

# HT-25 by

The NEXT GENERATION High-Temp Sanitizer

- Wash, rinse, and sanitize in as little as 45 seconds – Fastest in the industry!
- POWERFUL 3 HP PUMP – Scrubs away what others leave behind!
- Low water usage – only .85 gal. per load!



(AVAILABLE WITH)  
STAINLESS STEEL BUILT-ON BOOSTER.



- Approved Dual Sanitizer – Same machine serves as either High or Low Temp
- Versatile door design – installs corner or straight

**Increase your warewashing capacity without expanding your kitchen. Our HT-25 washes 35% FASTER with 33% LESS CHEMICALS, UTILITIES, AND WATER**

*The features of the HT-25 eliminate re-washes. A powerful design with powerful results!*

At American Dish Service, Quality People, Designs, and Products have been the foundations of our organization for over **45 years**.

[www.americandish.com](http://www.americandish.com)




**American Dish Service**  
Manufacturers of Ware Washing Equipment

900 Blake Street Edwardsville, KS 66111-3820 **Toll Free (800) 922-2178** **Phone (913) 422-3700** **Fax (913) 422-6630**

# HT-25 *The NEXT GENERATION High-Temp Sanitizer*

This powerful, next generation, high-temp sanitizer provides you with all these features...

- Available with either 45 or 60 second time cycle
- Patented Self Cleaning Spray System
- Auto fill and Auto Shut Off (Standard Equipment)
- Two stage SS Drain Filter – Eliminates clogged pumps
- Built-in Scrap Accumulator – Keeps Wash Tank Clean
- 3 HP Wash Pump
- ADS patented Low-Water Protection
- Durable-life tank heater
- Patented Captive spray arm end caps – no parts to lose
- 18" Door Opening
- Configured for corner or inline – installs without conversion
- No troublesome circuit boards – prevents down time

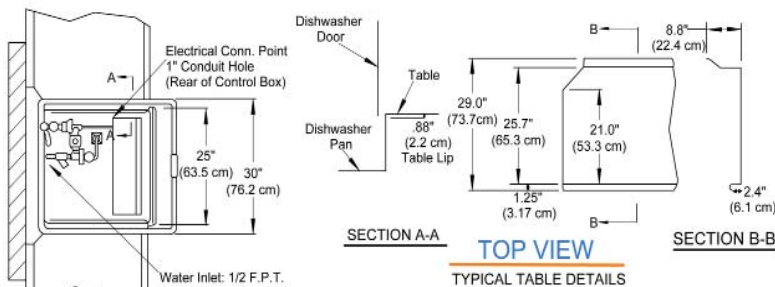

**American Dish Service**  
Manufacturers of Ware Washing Equipment

## Model HT-25 Specifications

U.S. REGISTERED PATENTS


RATED CAPACITY (Racks/Hour)	72 NSF Rated
WASH TANK CAPACITY	11 Gal. (41.63 Liters)
WATER TEMPERATURE, WASH	160 F. (71 C)
WATER TEMPERATURE, RINSE	180 F. (82.2 C)
WATER CONSUMPTION	0.85 Gallons/Rack (3.593 Liters/Rack)
WASH MOTOR	3 HP
ELECTRICAL REQUIREMENTS	3PH, 208/240V, 40 AMP, 60 HZ 5-wire connection (neutral, ground, 3 #8 power wires, 50a capacity) SINGLE PH: 208/240V, DUAL CIRCUITS 60/30 AMP, 60HZ CIRCUIT 1: (neutral, ground, 2 #10 ga. wires, 40a capacity) CIRCUIT 2: (2 #6 ga. wires, 75a capacity)
WASH HEATER	HT-25HT-34 W/FACTORY INSTALLED BOOSTER: (3-Ph Only) single point connection req's 208/240V, 3PH, 50a, 5-wire connection (Neutral, Ground, 3 #8 ga. power wires, 65a capacity) High leg goes to L-3 .....8KW
RACK SIZE	.....19-3/4" X 19-3/4" (50.2 cm x 50.2 cm)
DOOR CLEARANCE	.....18" (45.72 cm)
WATER INLET (1)	.....1/2" F.P.T.
DRAIN SIZE	.....2" F.P.T.
HEIGHT (all doors closed)	.....74" (187.96 cm)
WIDTH, TABLE TO TABLE (Inline Model)	.....25" (63.5 cm)
WIDTH w/SCRAP ACCUMULATOR (Overall)	.....37" (93.9 cm)
DEPTH (Overall)	.....33.5" (85.0 cm)
SHIPPING WEIGHT	.....485 POUNDS (219.9 kg)
SHIPPING VOLUME	.....81.51 cu. feet

\* Manufacturer reserves the right to modify these specifications in compliance with regulatory agencies and manufacturing expediency.

### CAUTION:

Electrical and plumbing connections must be made by a qualified Service Person who will comply with all available federal, state, and local Health, Electrical, Plumbing, and Safety Codes.

NOTE: All Three Doors Open in Unison for Inspection & Cleaning Purposes and Allows for Inline or Corner Applications without Conversion Procedures.

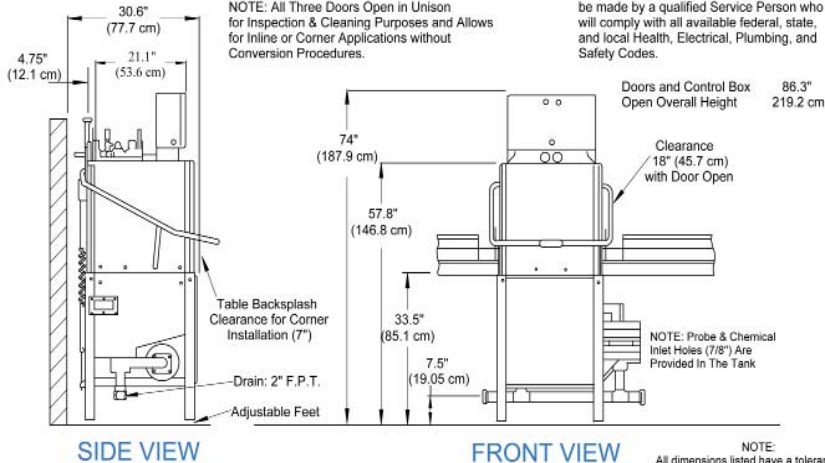

© 10/2010

Effective: 10/2010

ADS has built a strong history based on Customer Service, Quality and Reliability. A Commitment to Excellence is the driving force behind American Dish Service.